

SERIES CE

INTELLIGENT ELECTRIC LOCK

We overcome any obstacle

Our electric locks are 100% reversible. They have a side-sliding cylinder from 50 to 70 mm and an adjustable front. They are usually installed on both wooden and metal interior doors, gates and hinged parking doors. For improved security, they can be unlocked using an access control system or a key (3 keys included).




MOTORIZED Technical characteristics


Voltage:	12-24 V DC
Consumption:	340 mA - 170 mA
Installation:	Surface
Material:	Nickel

**ACOUSTIC
Alarm**
When the door does
not close properly

**Magnetic
SENSOR**

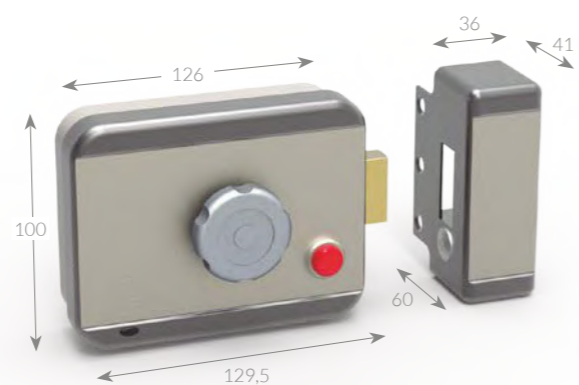

CE104
With push button
(Temporary unlocking)



CE105
With switch
(permanent release)



CE106
With knob



CE109
With key (cylinder)



VCX100 (Optional)
Steel visor to cover the lock.
Outdoor rain cover

ELECTRIC Technical characteristics

Voltage:	8 - 12 V AC/DC
Consumption:	1,5 A starting 0,9A (8 V AC), 1,7A (12 V AC), 2,4A (8 V DC), 3,6A (12 V DC)
Installation:	Surface
Material:	Steel case
Adjustable input distance:	50 - 70 mm



CE110
With key



CE111
With mechanical pushbutton



CE112
With key and mechanical pushbutton



VCX200 (Optional)
Steel visor to cover the lock.
Outdoor rain cover